


INSECT-PROOF

WALL-MOUNTING-TYPE

AIR CURTAIN

頂吹型 防蟲空氣簾

AAC-20007DC

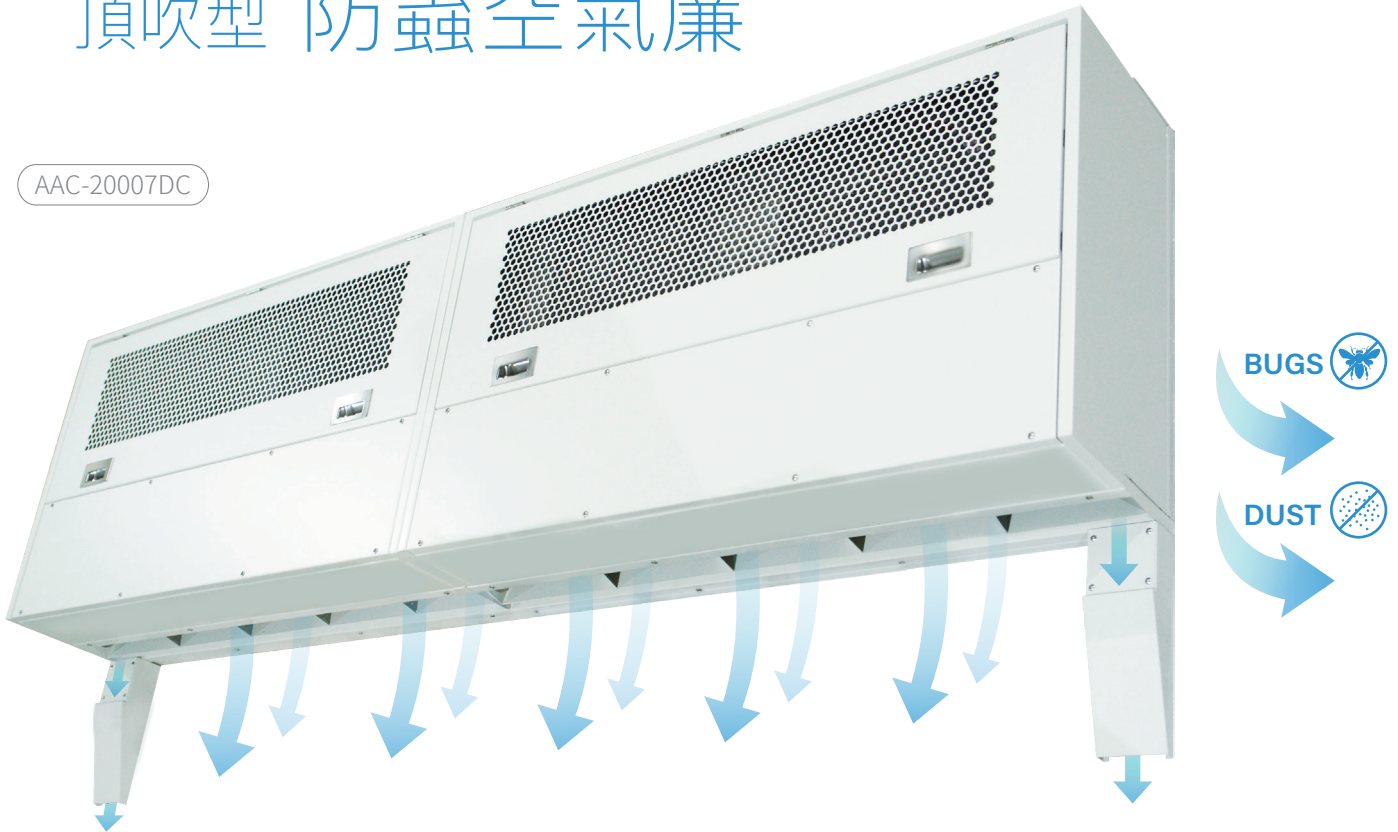

Promote better manufacturing practices, **mobile unit**
Narrow/wide entryway application



Photo credit :
Saitama Koshigaya Factory (Japan)

Applicable warehouse & Incoming dock

Standard Air curtain 's efficiency has a tendency to drop by 20% when entry way is > 3m. The wall-mounting type is highly recommended in this case, to keep the efficiency level intact.




Reasonable price

We made switching from the standard to the wall-mounting curtain type at an affordable price, possible.




Our special design air outlet

The inclined surface of the outlet air plate is able to blow oblique air flow, which effectively prevent the insects from passing through, and at the same time, reduce small-sized foreign matter or pollutants .



Triangular base

Located at the base of the unit, these outlets help control the air flow direction reinforcing the control of insects and other particles.

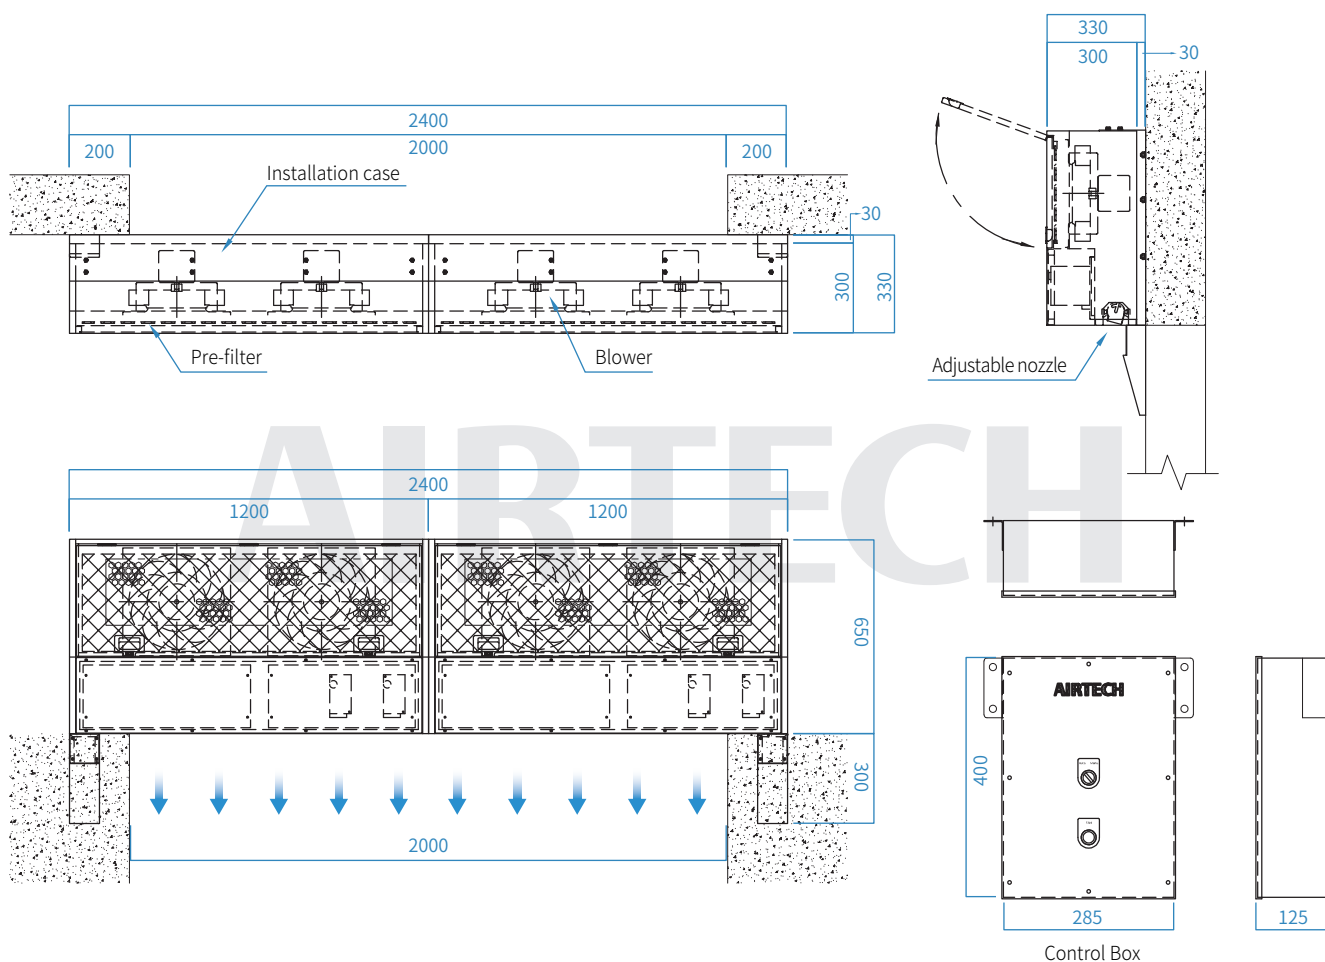

AAC-20007DC

Specification

Model	AAC-20007DC
Pre-Filter	Non-woven nylon filter 325 x 1115mm x 2PCS
Air Velocity(m/s)	18 ~ 30 (Note: Customizable unit.)
Air Volume(CMM)	129
Power Consumption(VA)	2700
Blower	LNF-6E-2 x 4 SET
Weight(Kg)	170
Electrical	AC 220V 3Φ 50/60Hz
Construction	Coldrolled steel with Bake Painting

Note: The product specifications change without notice.

