

AIRTECH

洗手烘乾機

CLEAN HAND WASHER DRYER

Drying with purified air,
provides **hygienic** · **ensure** safe operation

AHW-06

1 Improves drying performance

The use of DC high-pressure brushless motor, increases air volume and drying efficiency and energy conservation.

2 Enhance drying efficiency

High blowing speed (100m/s) to dry hands in shorter time.

3 Equipped with germicidal lamp

The standard is equipped with a germicidal lamp. When the operator approaches, the germicidal lamp is automatically switch off.




4 Strengthen hygienic mechanisms

It is optional to add antibacterial coating effectively improve the sanitary.

To reduce the inverted draught

Special structure design increases induced airflow to prevent water droplets from overflowing to the exhaust port.

— Reverse airflow
- - - Induced airflow
— Exhaust airflow

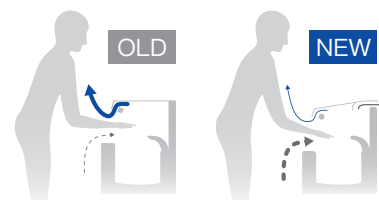

Good visibility

Using transparent tempered glass, you can clearly check the hand washing status without opening the upper cover.



Arc design

R angle arc design, visually rounded and easy to clean and maintain.



Concise the clear operation

The upper cover is affixed with instructions of the operation steps, which briefly and clearly describe the operation method.



Photoelectric sensor


There is a detection sensor on the front side, when a personnel leave the washer, the germicidal lamp automatically switch on.



Damping hinge

Use damped to improve smoothness.

Drawing

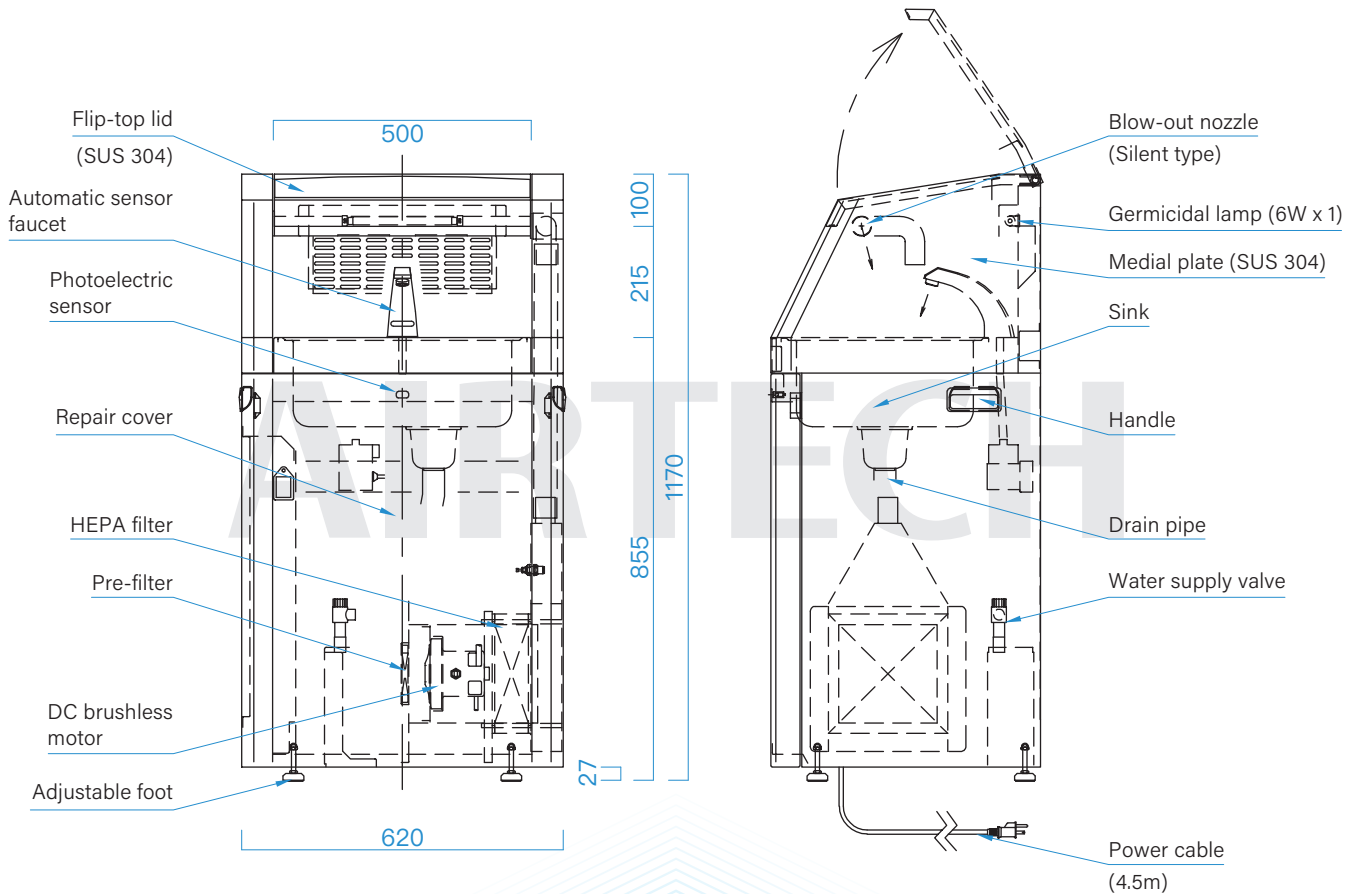

Specification

Model	AHW-06
Particle Efficiency	Above 99.99% Efficient On 0.3 μ m Particles
Pre-filter	Non-woven filter 110x185x12t x 1pc
Main filter	HEPA filter 230x230x65t x 1pc
Air Velocity(m/sec)	About 100
Air Volume(CMM)	About 2.4
Blower	High-voltage DC motor x 1pc (AC 110V 1 Φ 60Hz)
UV light	6W x 1pc
Color	Ivory white / Pearl white(Optional antibacterial coating)
Weight(kg)	60
Power Consumption(VA)	900(1500 Max.)
Structure	Main structure: cold-rolled steel plate bake painting